


**INSTALLATION INSTRUCTIONS FOR  
GAS CADDY : FX NYTRO RTX, MTX, XTX**

SMA-8GL73-CD-DY (USA)

00-8978-VMS

**YAMAHA**  **GENUINE**  
Parts & Accessories  
Pièces et accessoires

## 2. Assembling

- a) Screw the (2) M4x12mm Allen socket machine screws (#8), the (2) M4I.D.x9mmO.D.x0.8mm flat washers (#18), and the (2) M4 nylock nuts (#13) onto the bottom of the gas caddy (#1) (see Fig. 1).
- b) Fasten (6) grommets (#19) onto the gas caddy (#1) using the (6) M4x12mm Allen socket machine screws (#8) and the (6) M4 nylock nuts (#13) (see Fig. 2).
- c) Fasten the short strap (#2) onto the gas caddy (#1) using the No.8-32x1/4" slotted socket machine screw (#7), the 5.3mmI.D.x15mmO.D.x1.2mm Fender washer (#17), and the No.8-32x1/4" barrel nut (#12) (see Fig. 3).
- d) Fasten the long strap (#3) onto the gas caddy (#1) using the No.8-32x1/4" slotted socket machine screw (#7), the 5.3mmI.D.x15mmO.D.x1.2mm Fender washer (#17), and the No.8-32x1/4" barrel nut (#12) (see Fig. 3).
- e) Apply the rubber mat (#6) onto the bottom of the gas caddy (#1) (see Fig. 3).
- f) Slide the gas caddy (#1) through the opening located into the cover (#4) (see Fig. 4).
- g) Fasten the gas caddy (#1) to the cover (#4) using (2) No.8-32x1/4" slotted socket machine screws (#7) and (2) No.8-32x1/4" barrel nuts (#12) (see Fig. 4).

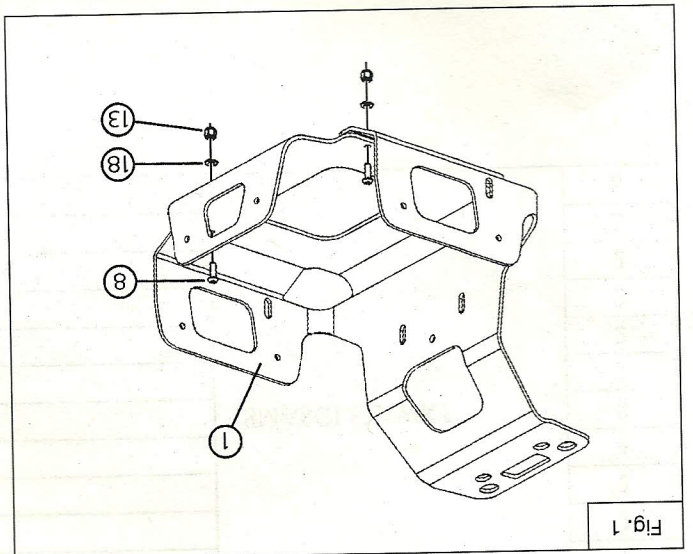


Fig. 1

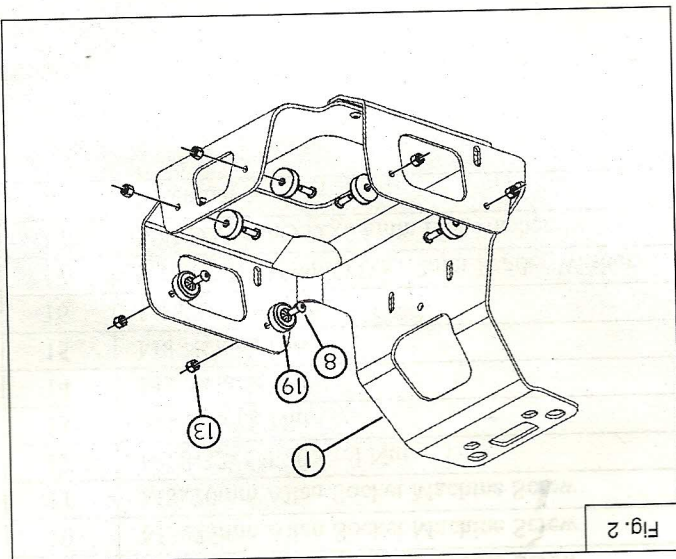


Fig. 2

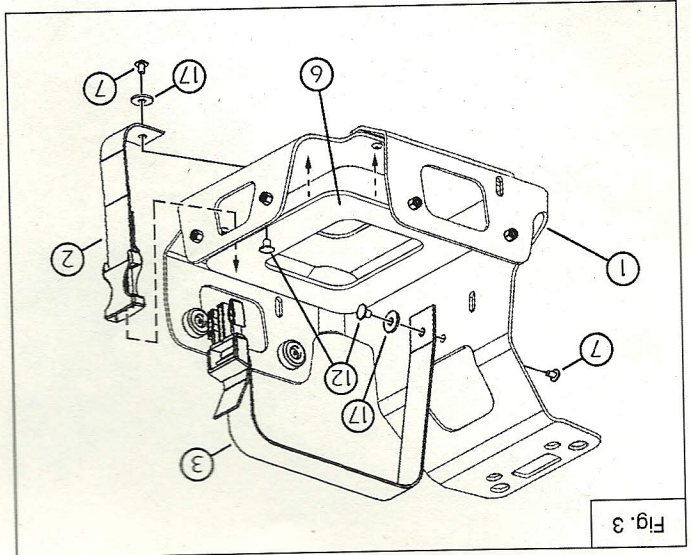


Fig. 3

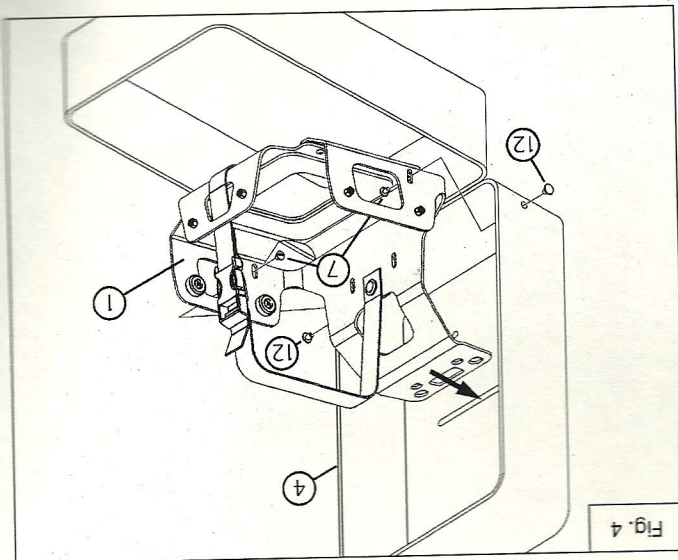


Fig. 4